

FIG. 1

FIG. 2 is a schematic diagram of a network system 200. The network system 200 includes a server 242, a network path 248, and three user devices 206, 218, and 230. The server 242 is connected to the network path 248 via a bidirectional connection 272. The network path 248 is connected to the user devices 206, 218, and 230 via bidirectional connections 254, 260, and 266, respectively. Each user device includes a display 278 and a user interface 212, 224, or 236.

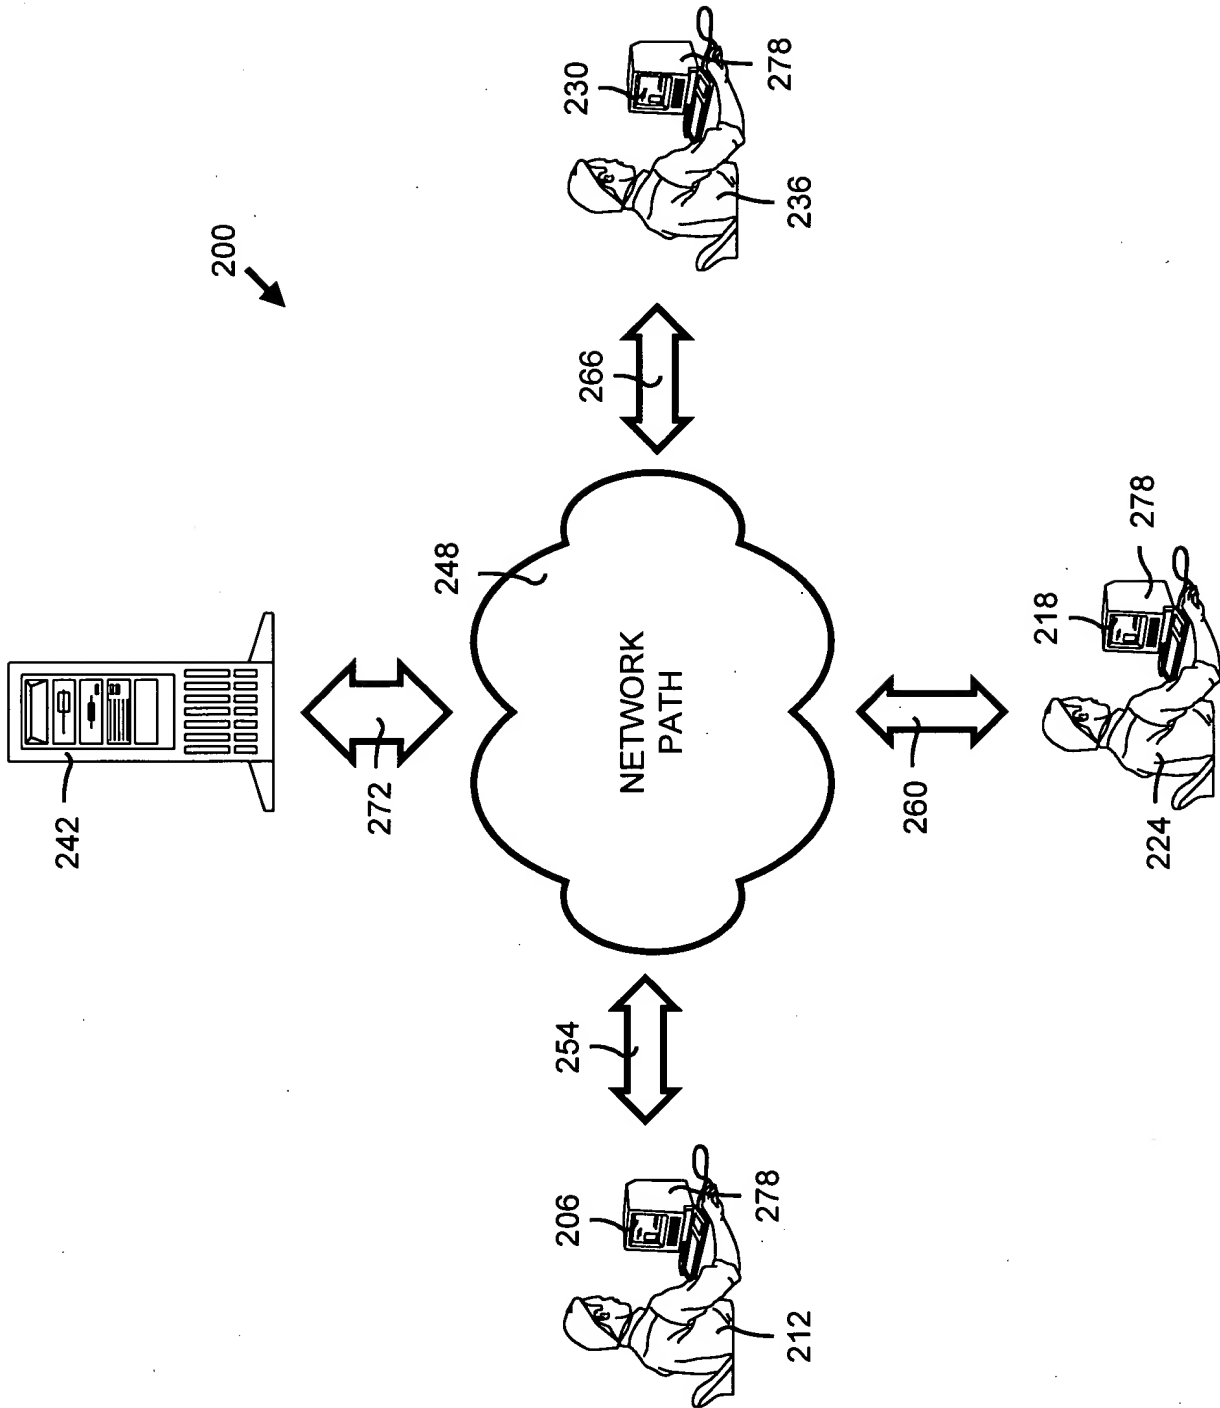


FIG. 2

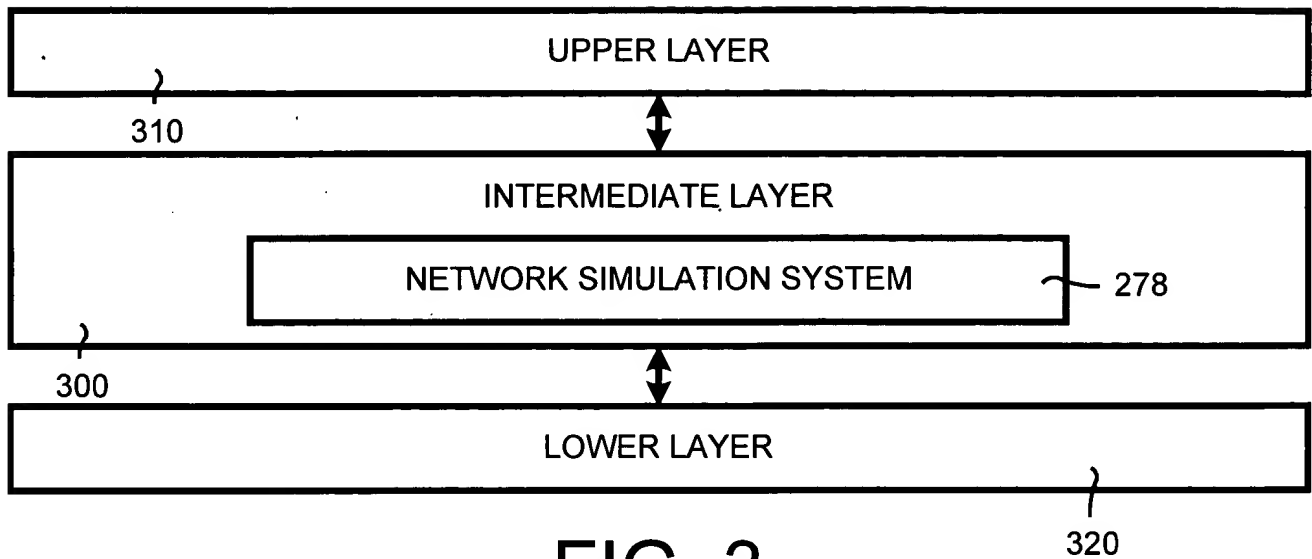


FIG. 3

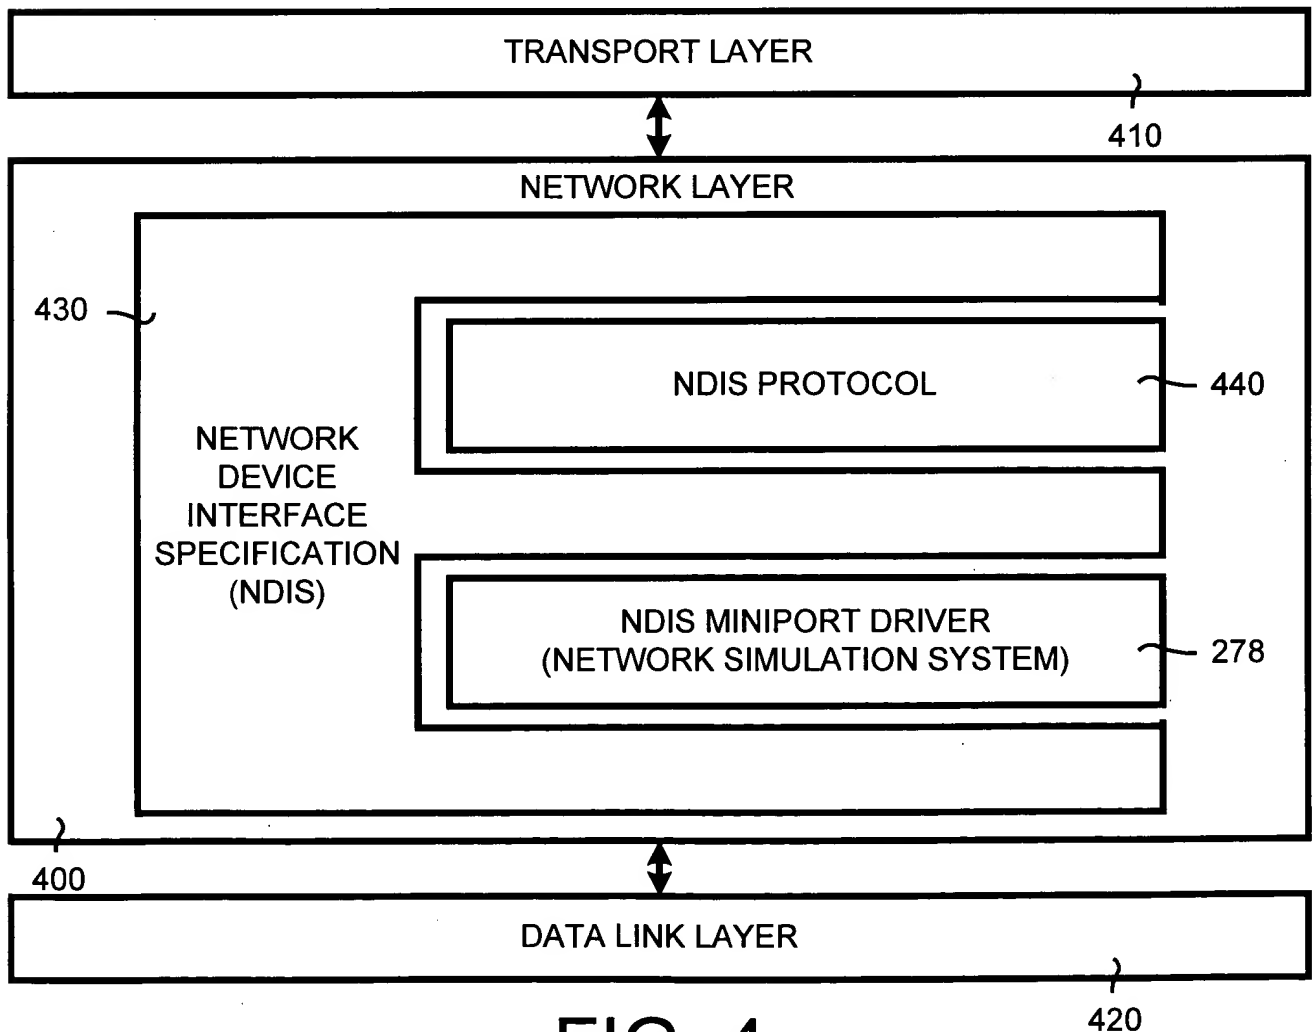


FIG. 4

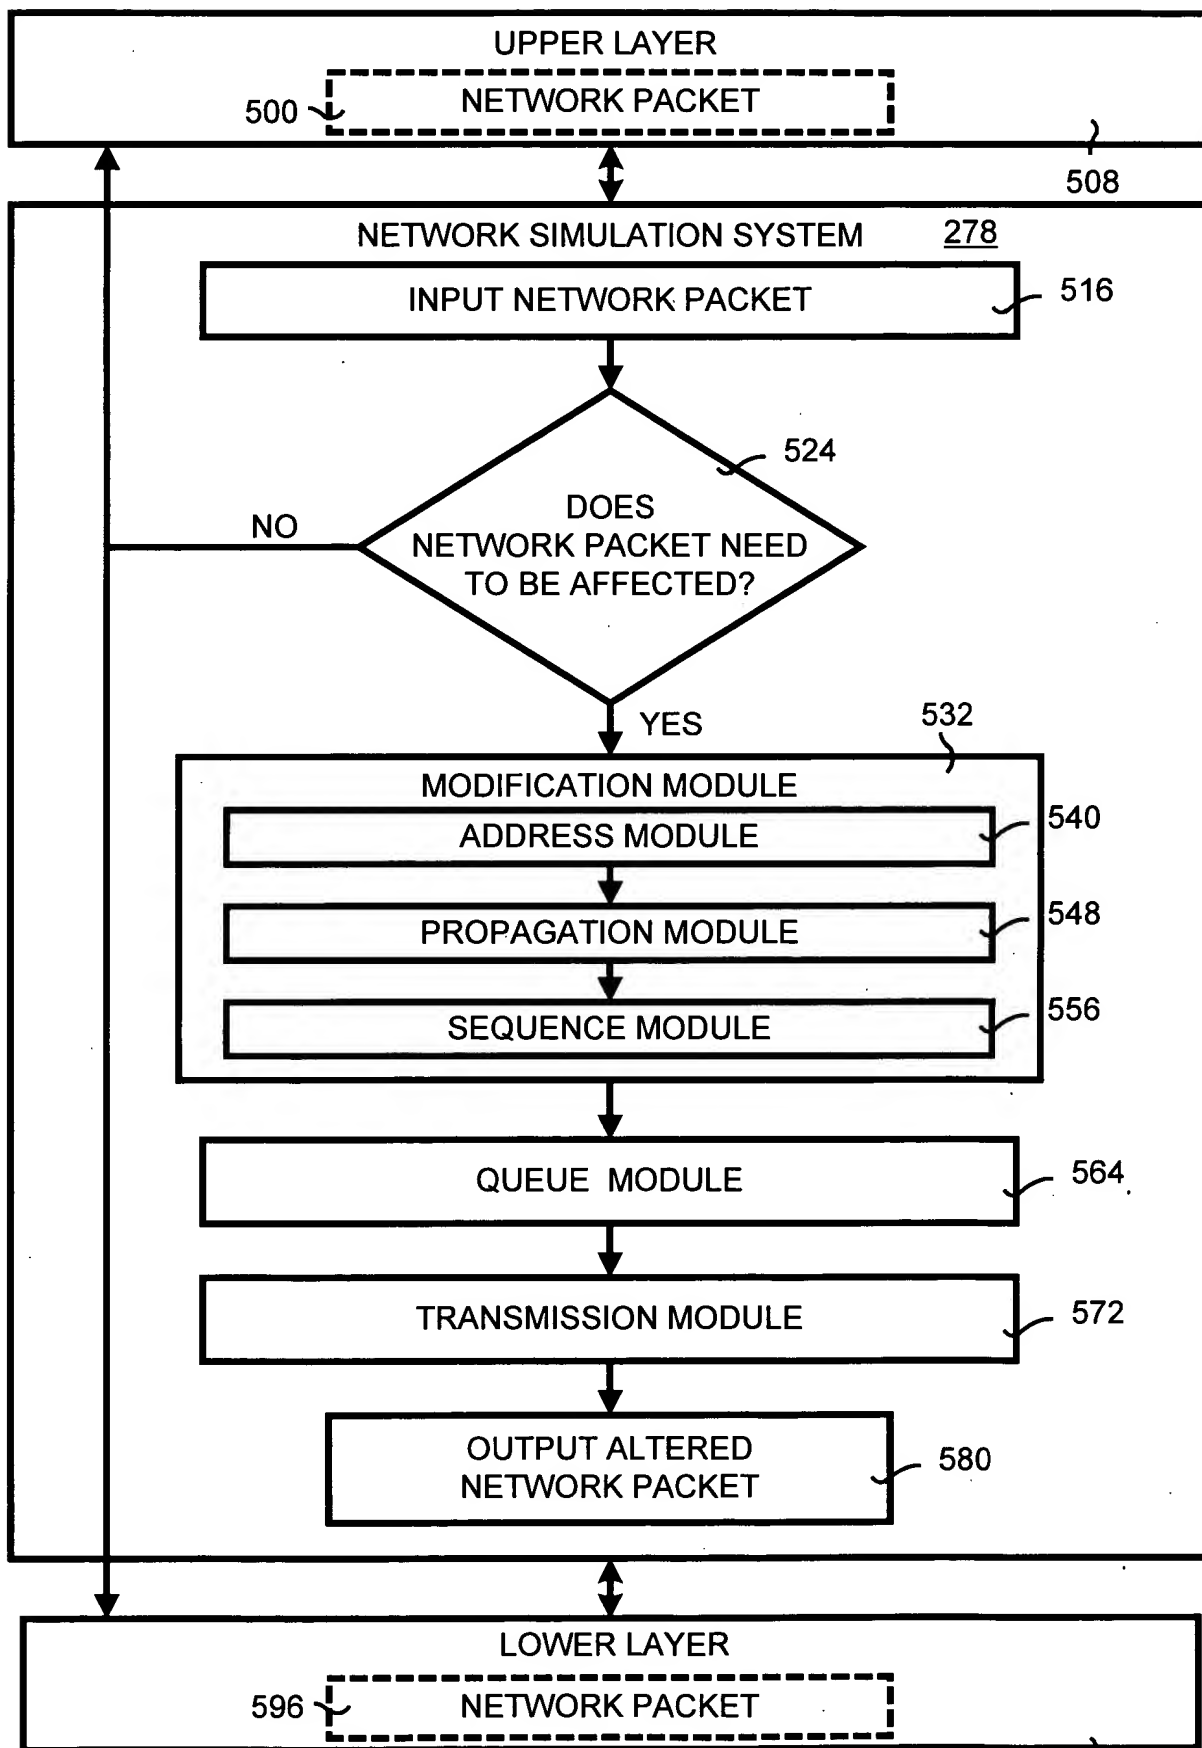


FIG. 5

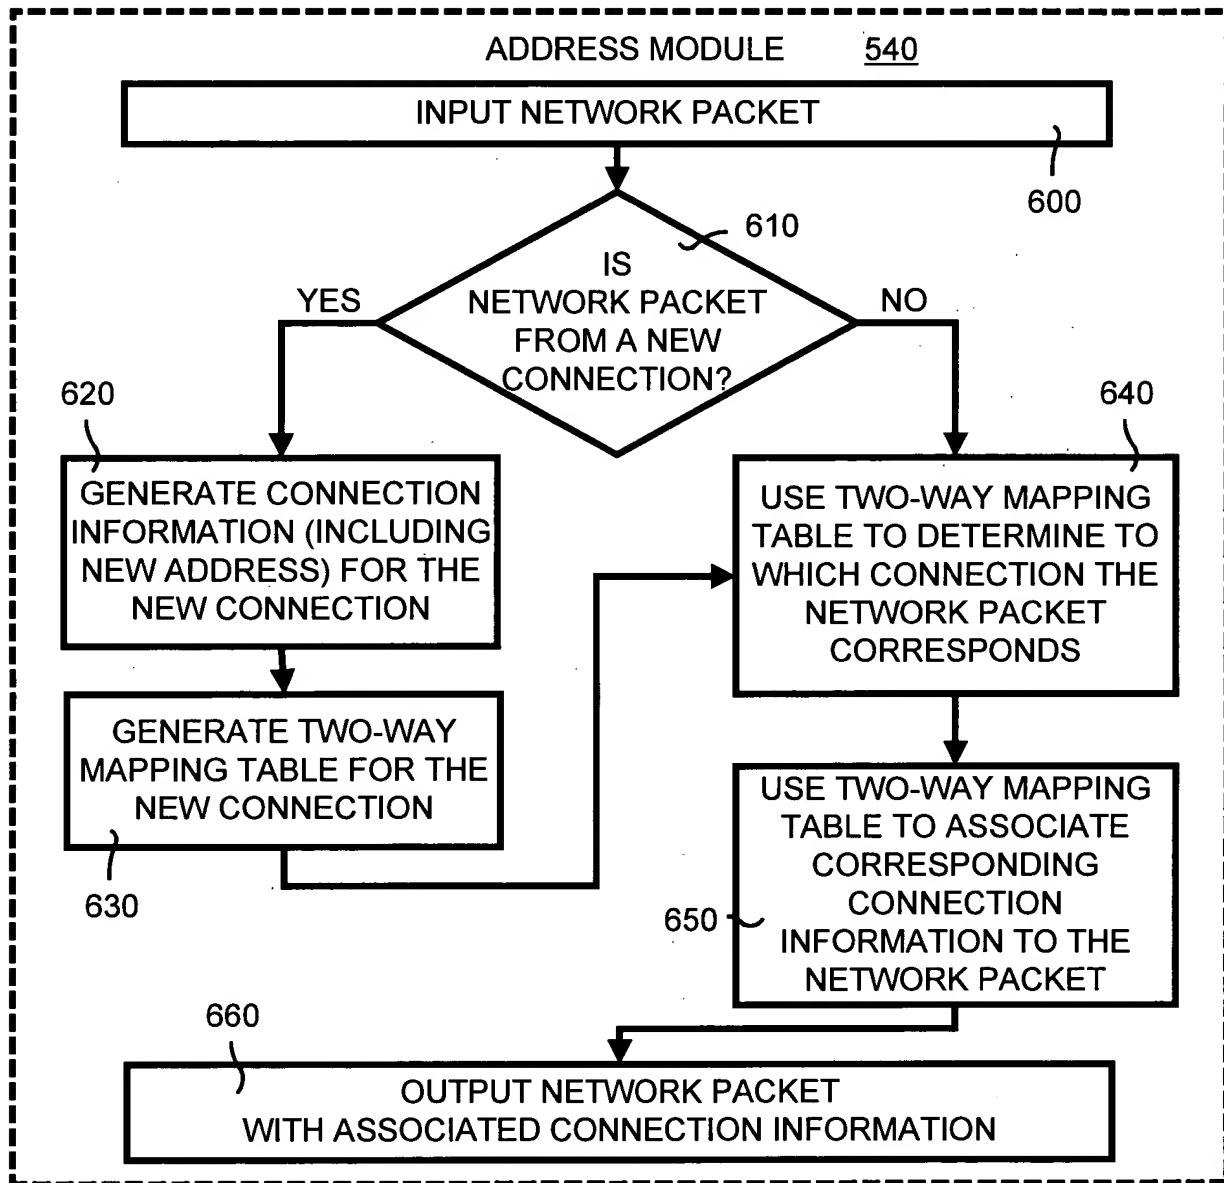


FIG. 6

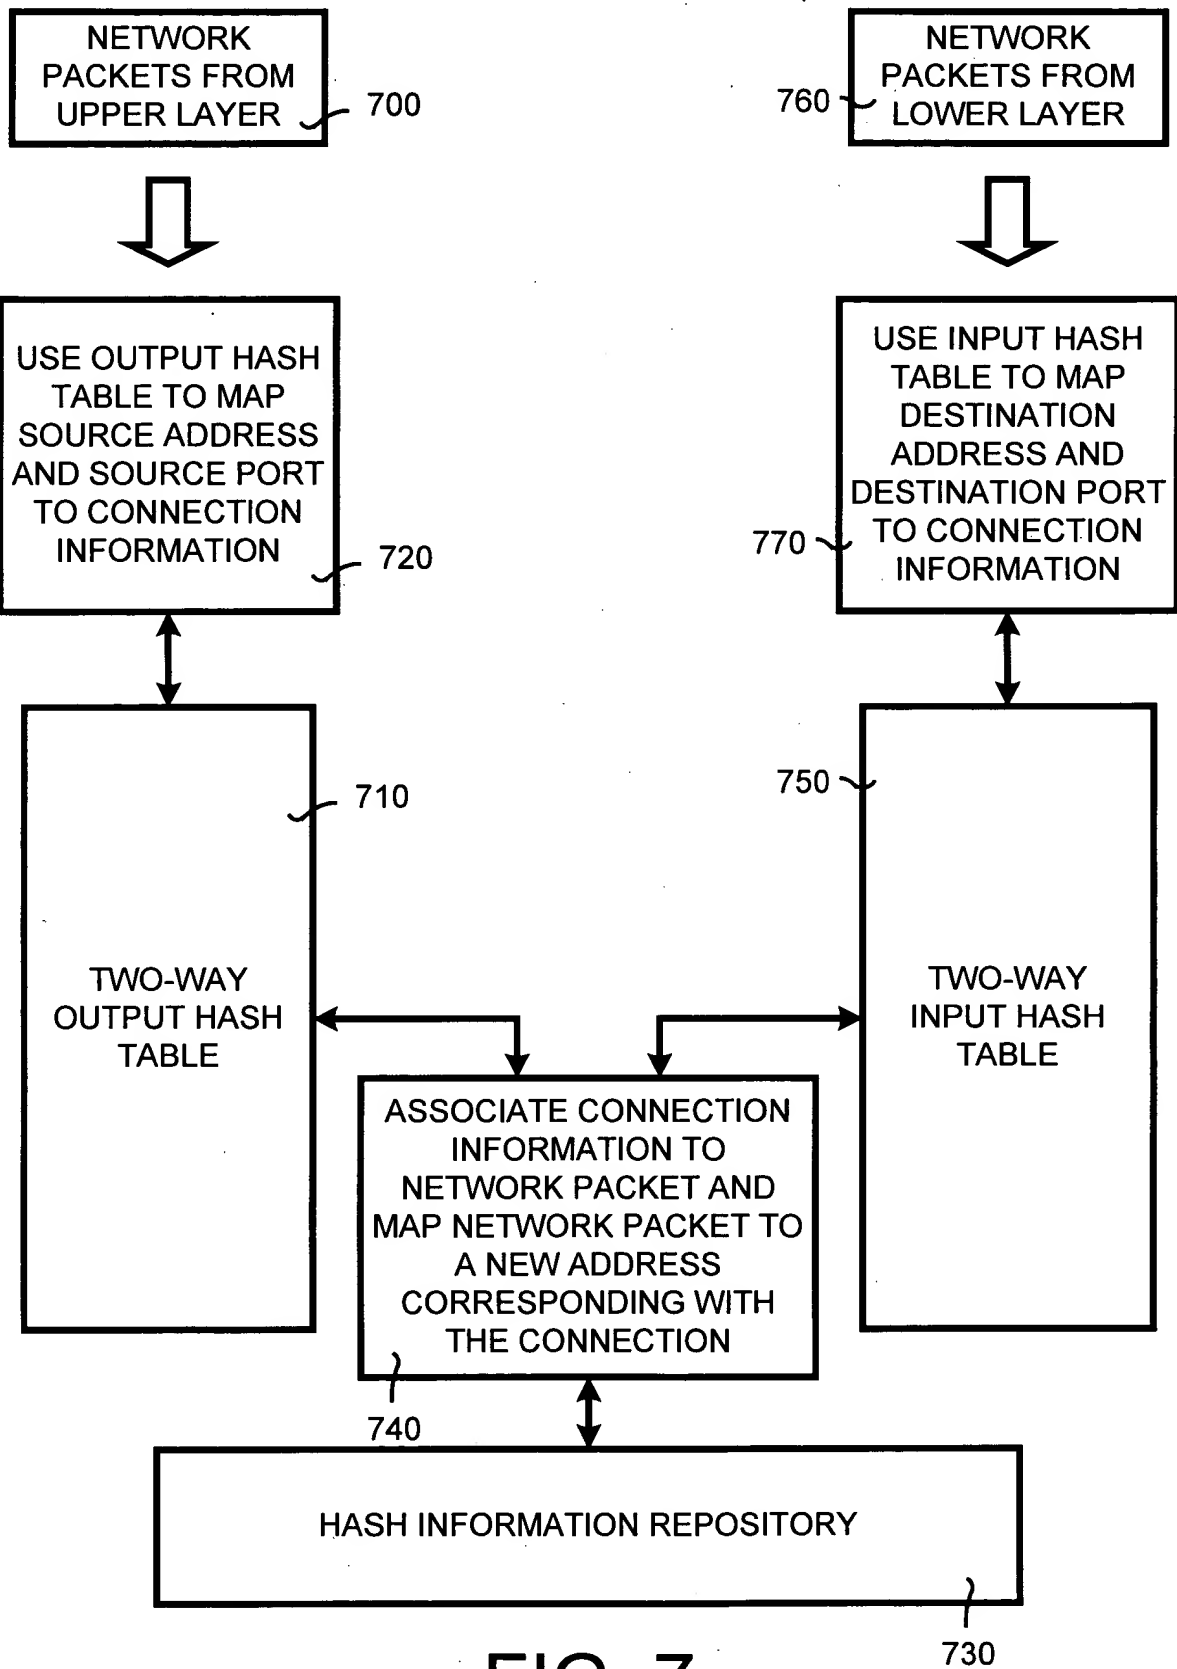


FIG. 7

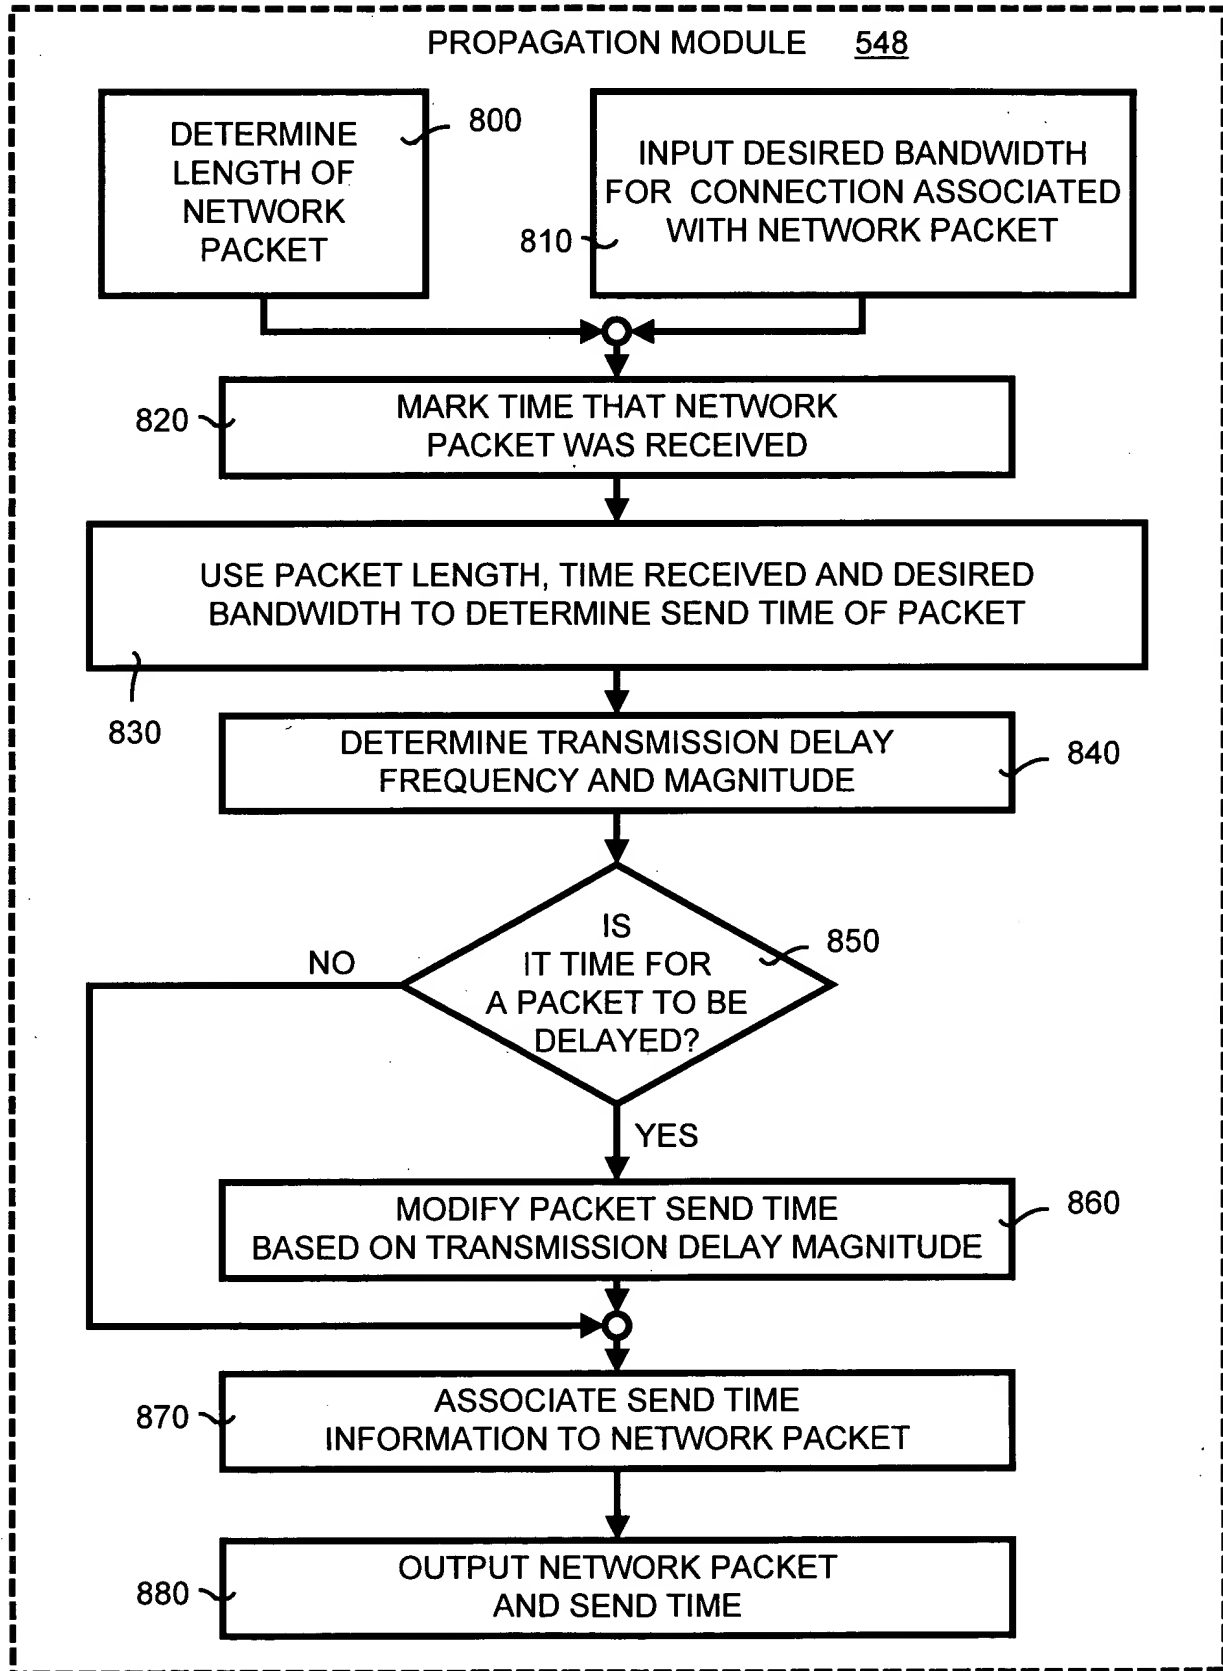


FIG. 8

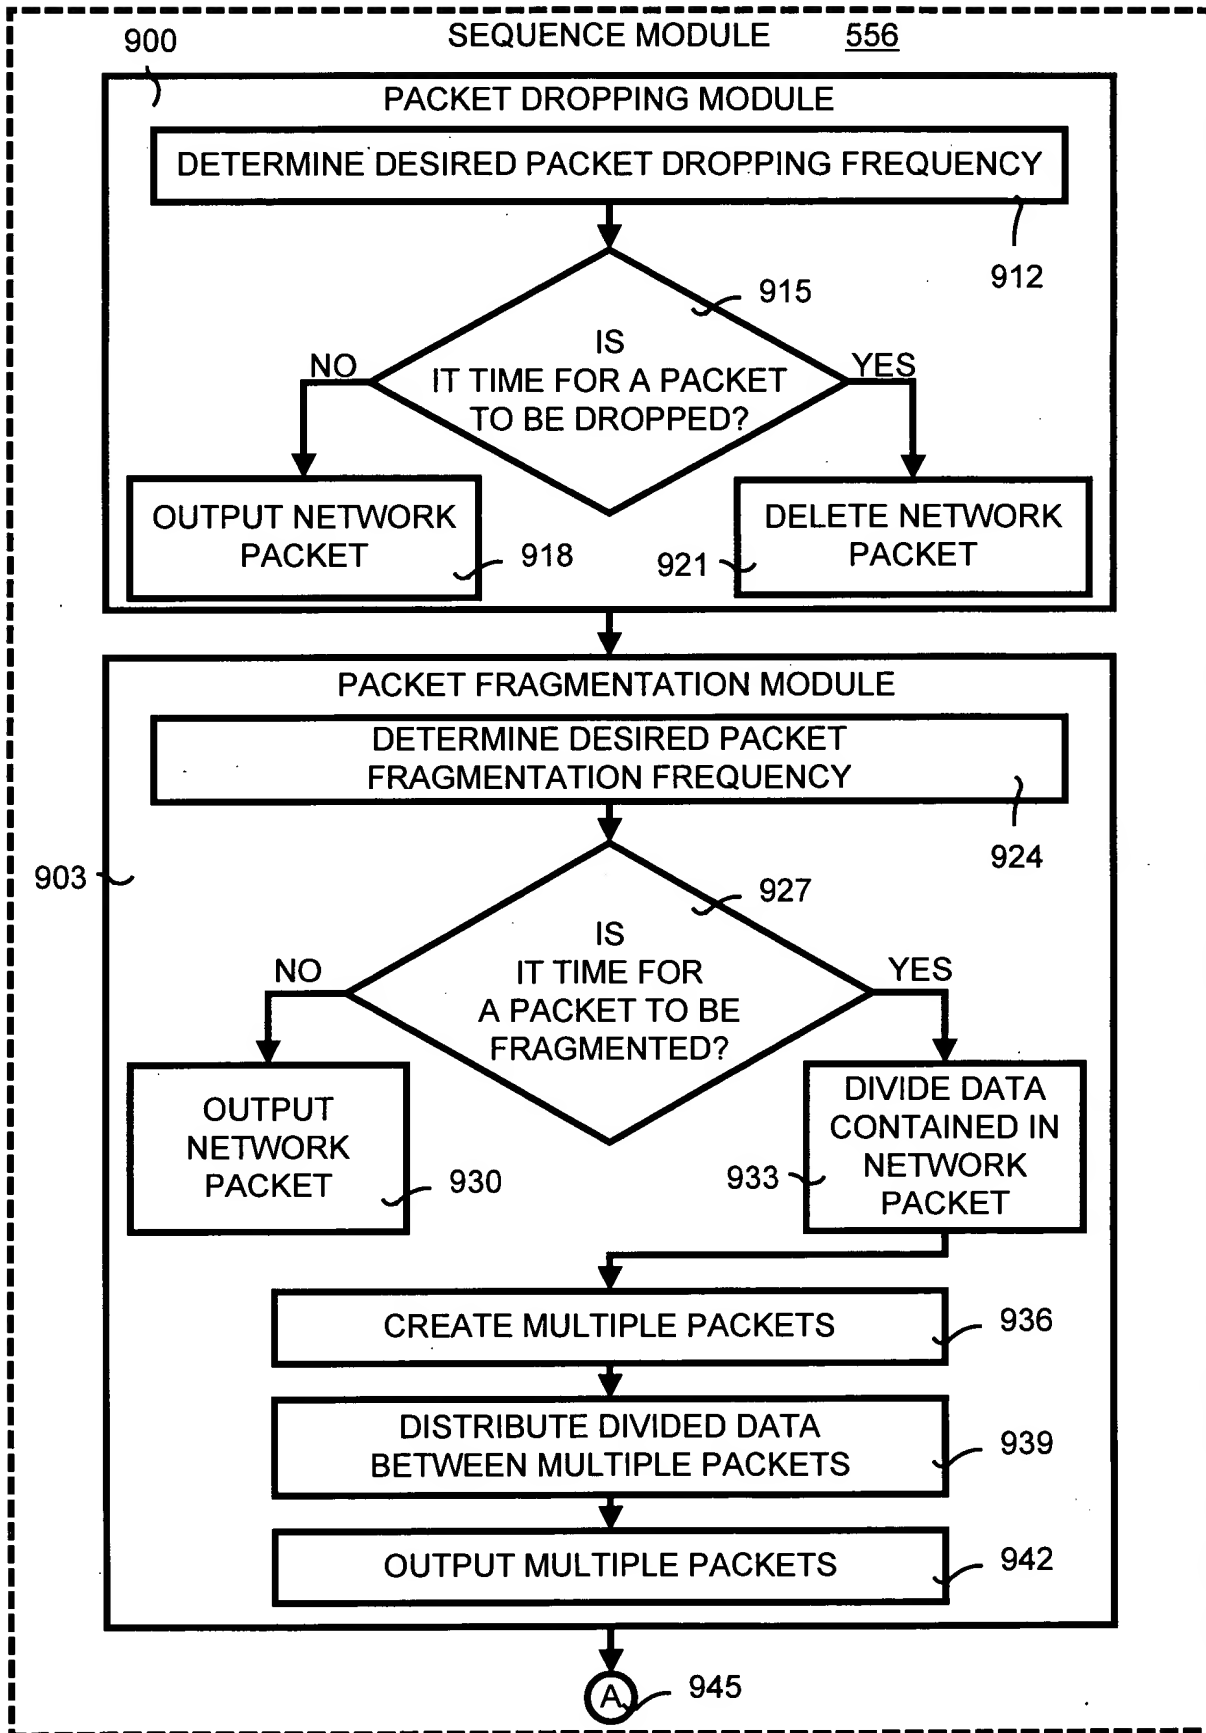


FIG. 9A

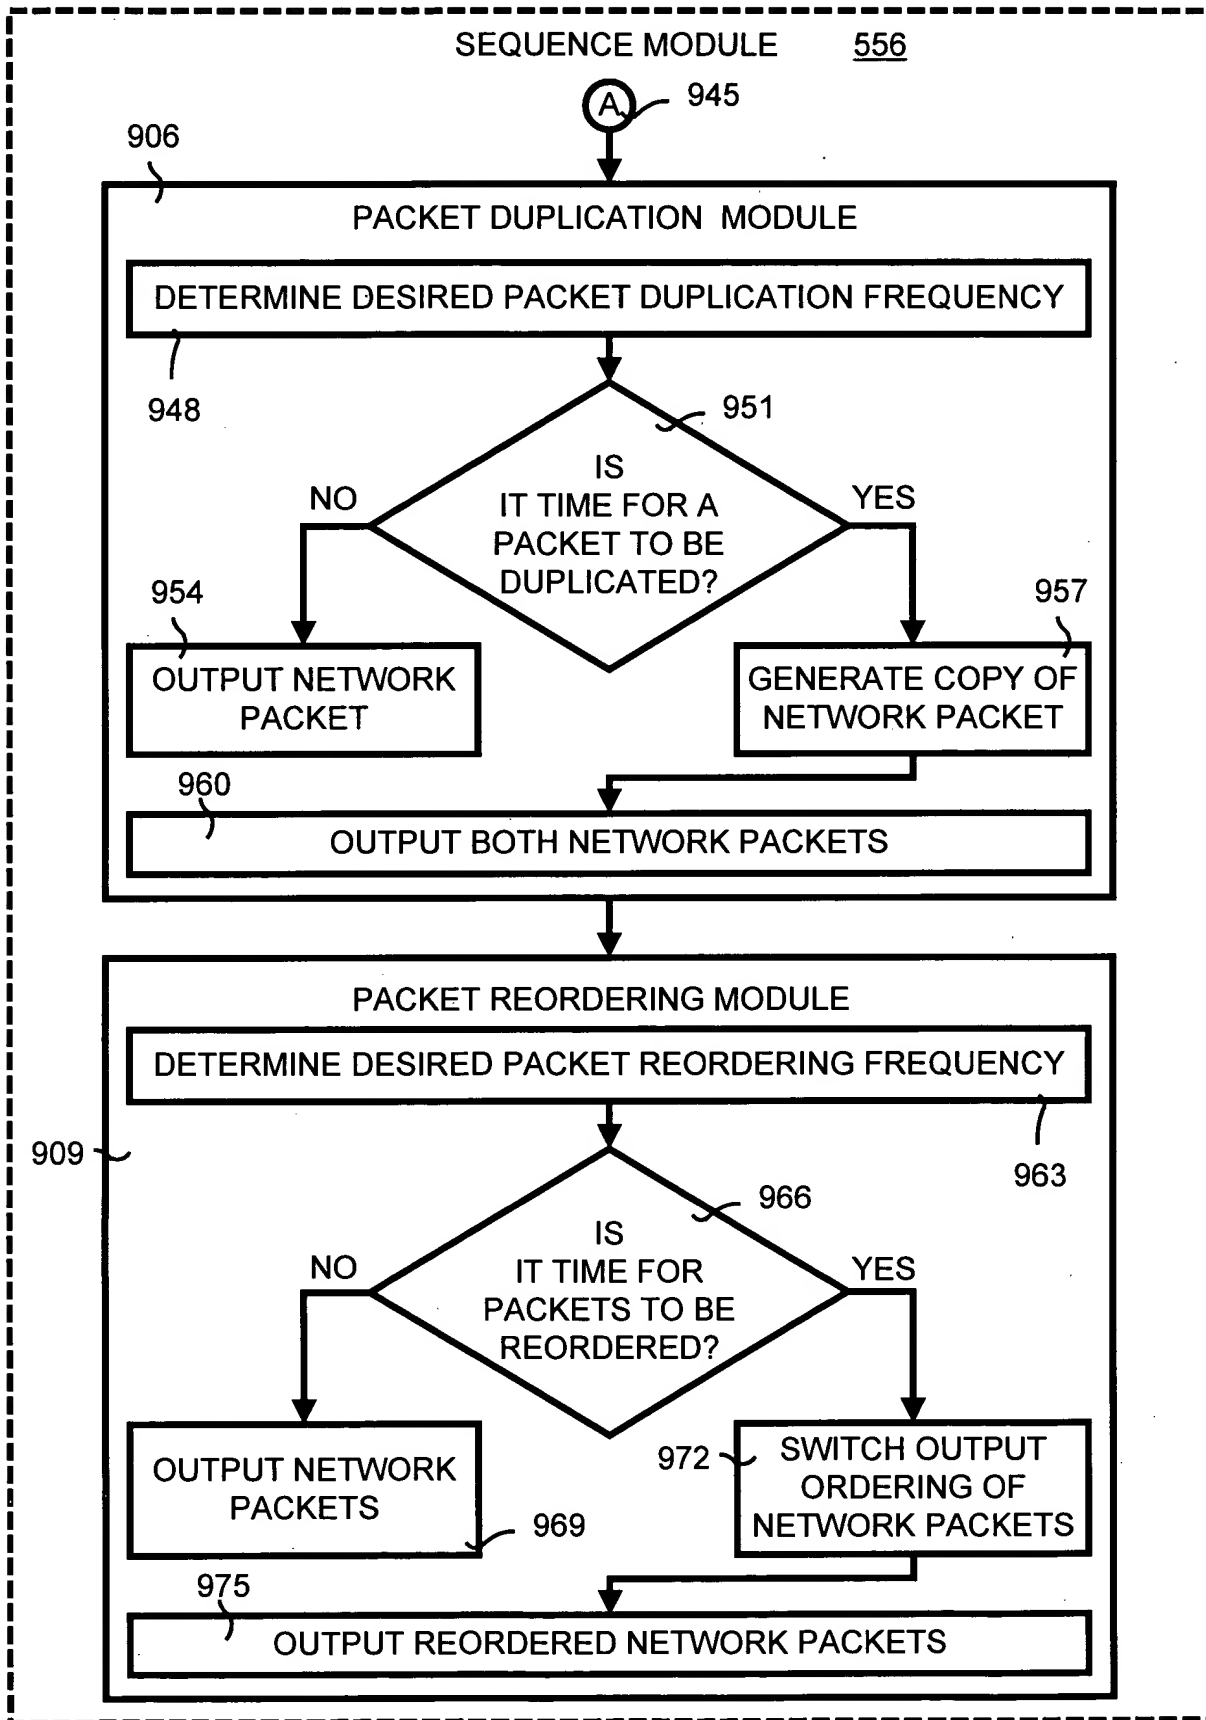


FIG. 9B

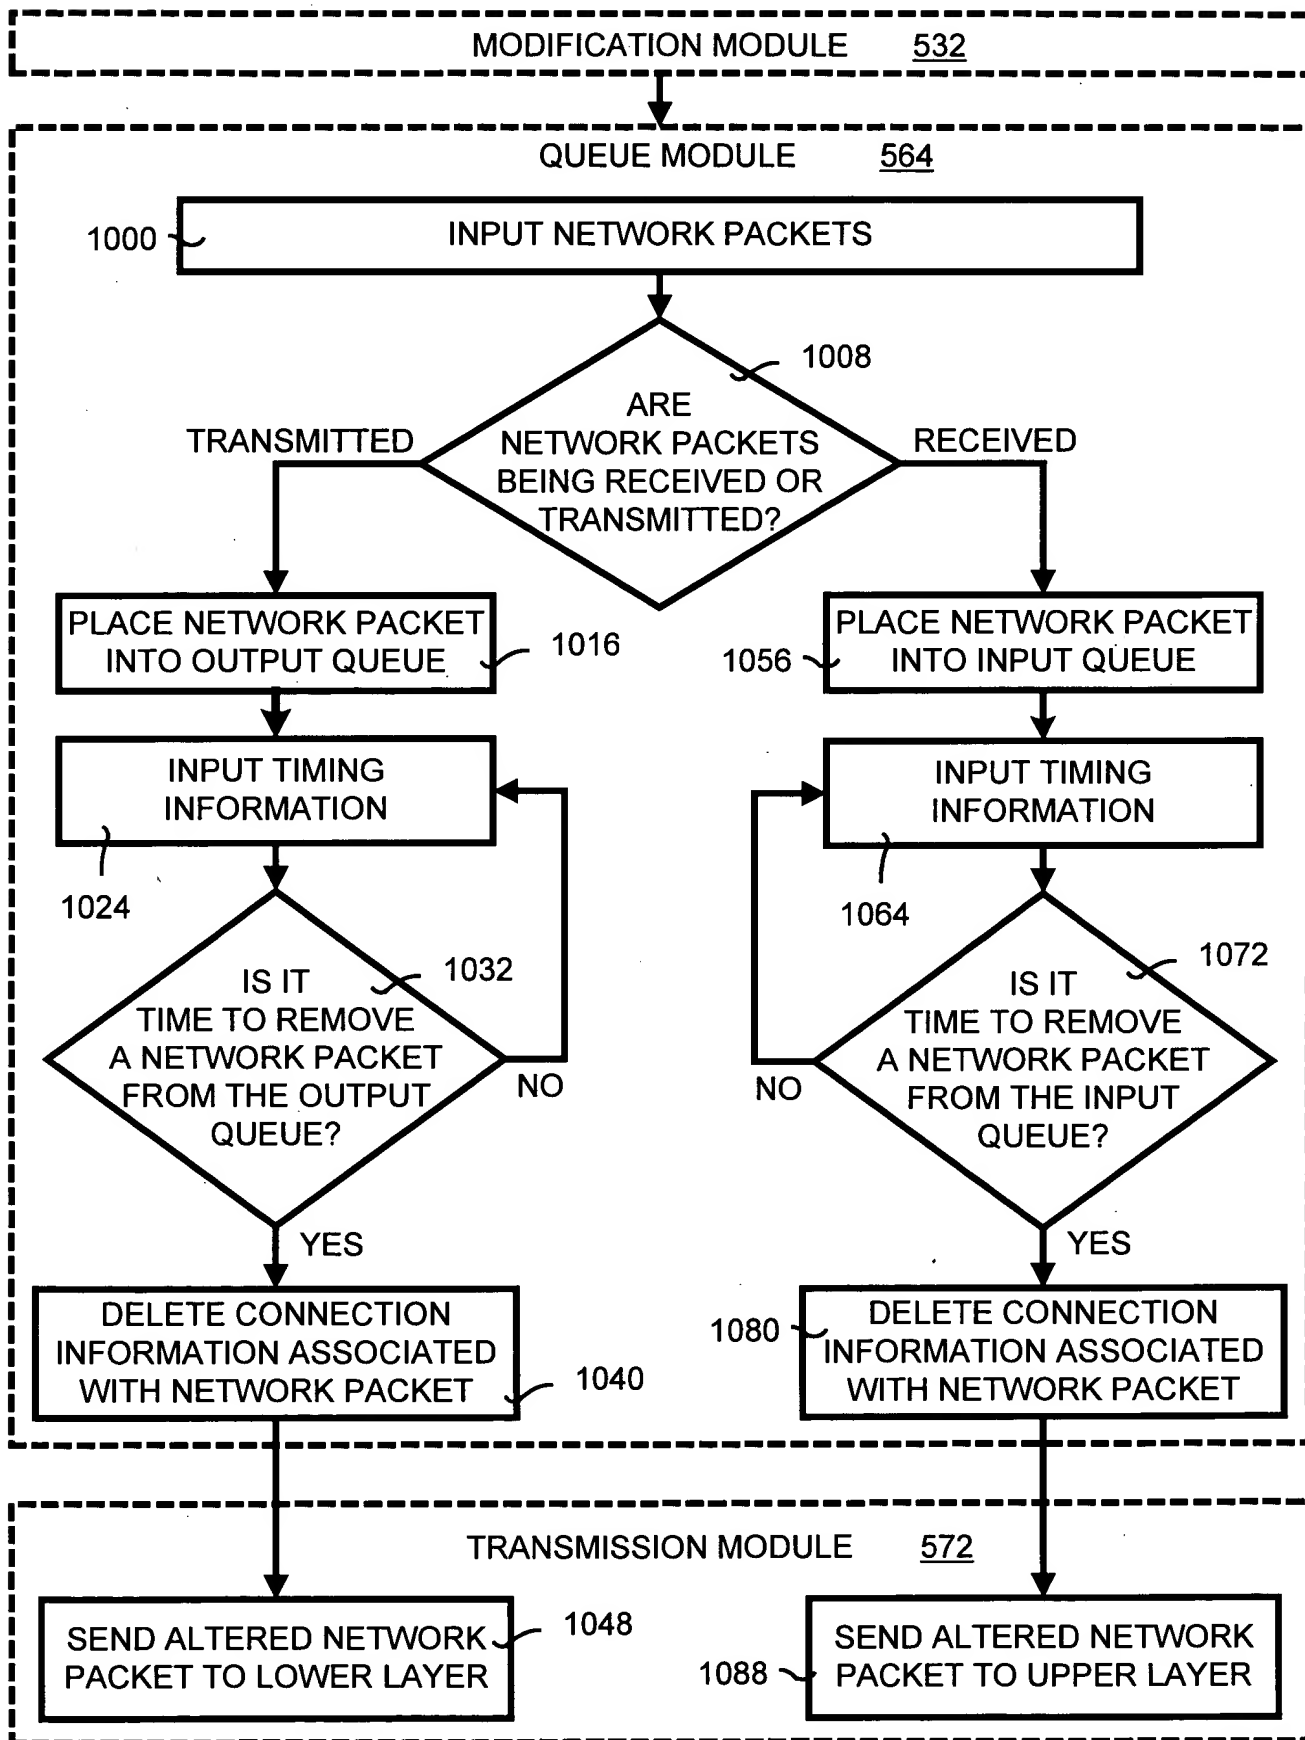


FIG. 10